

**FIG. 1**  
(Prior Art)

SYSTEM AND METHOD FOR TESTING SIGNALS WITHIN DIGITAL-NETWORK PACKETS

Peter Savage, et al.

EMPIR-068PUS

2/9

Ethernet header (14 bytes)	IP header (typically 20 bytes)	UDP header (8 bytes)	RTP header (12 bytes)	<b>RTP payload</b> (varies by codec)	Ethernet CRC (4 bytes)
-------------------------------	-----------------------------------	-------------------------	--------------------------	---	---------------------------

FIG. 2

(Prior Art)

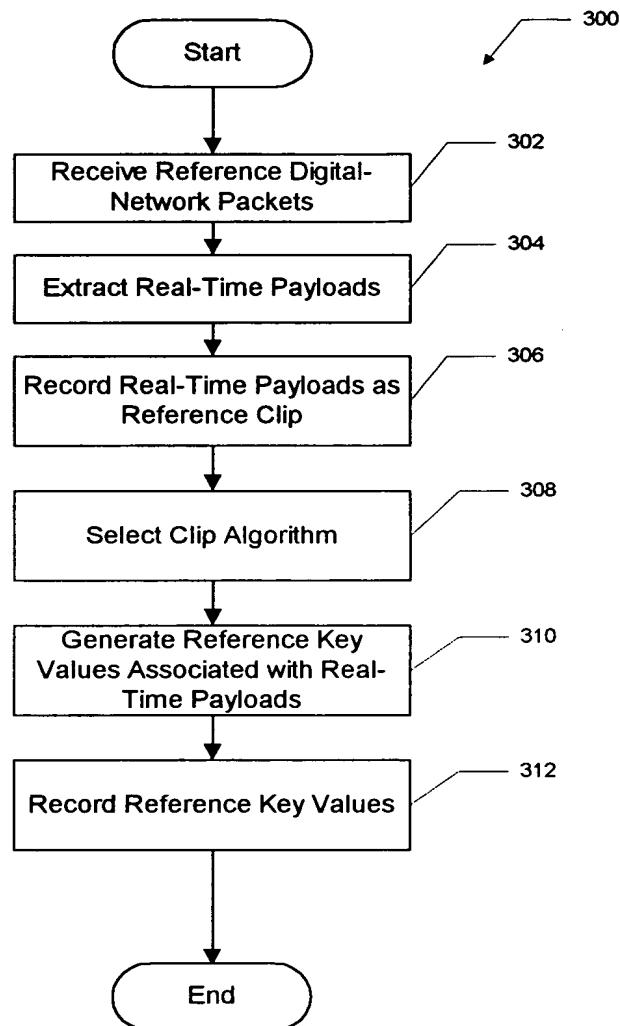


FIG. 3

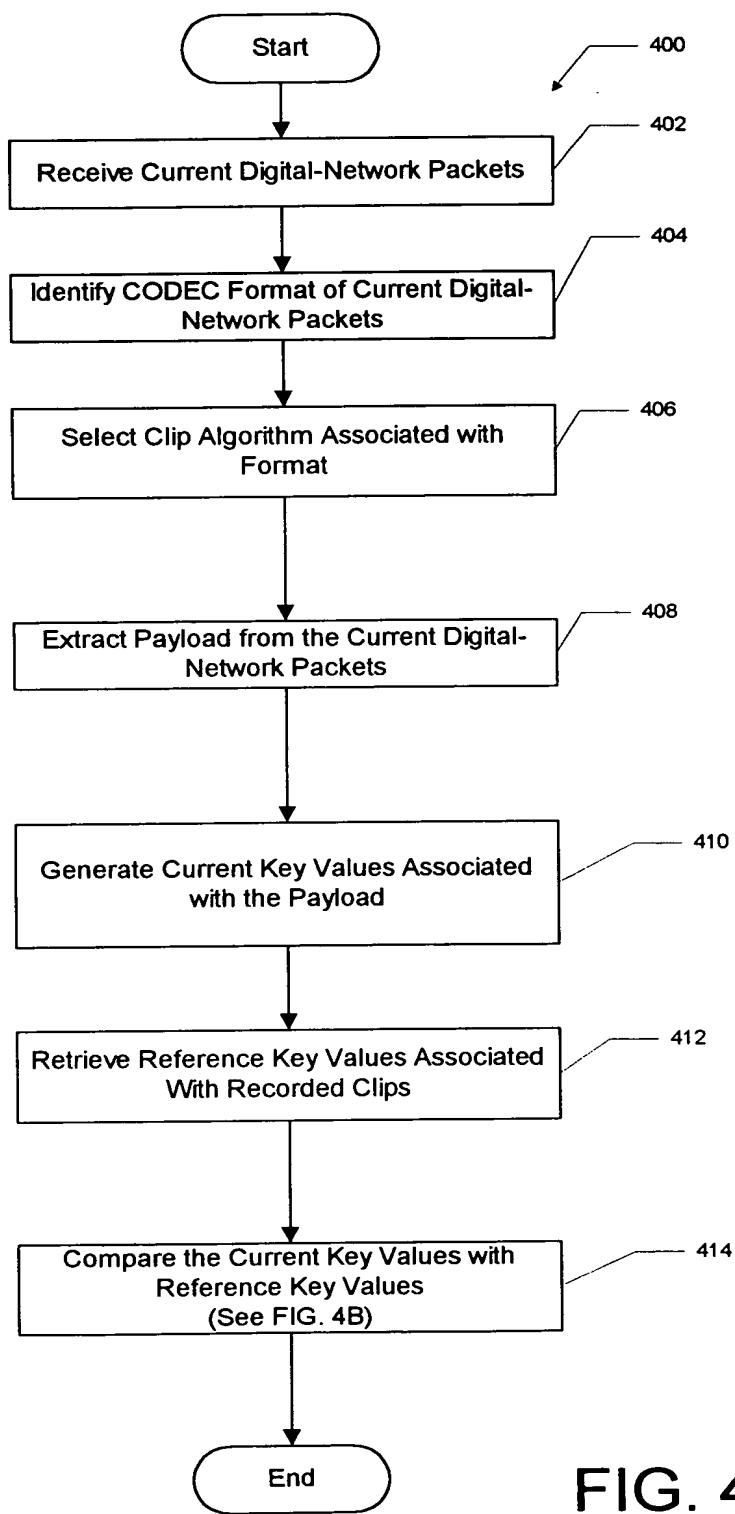


FIG. 4A

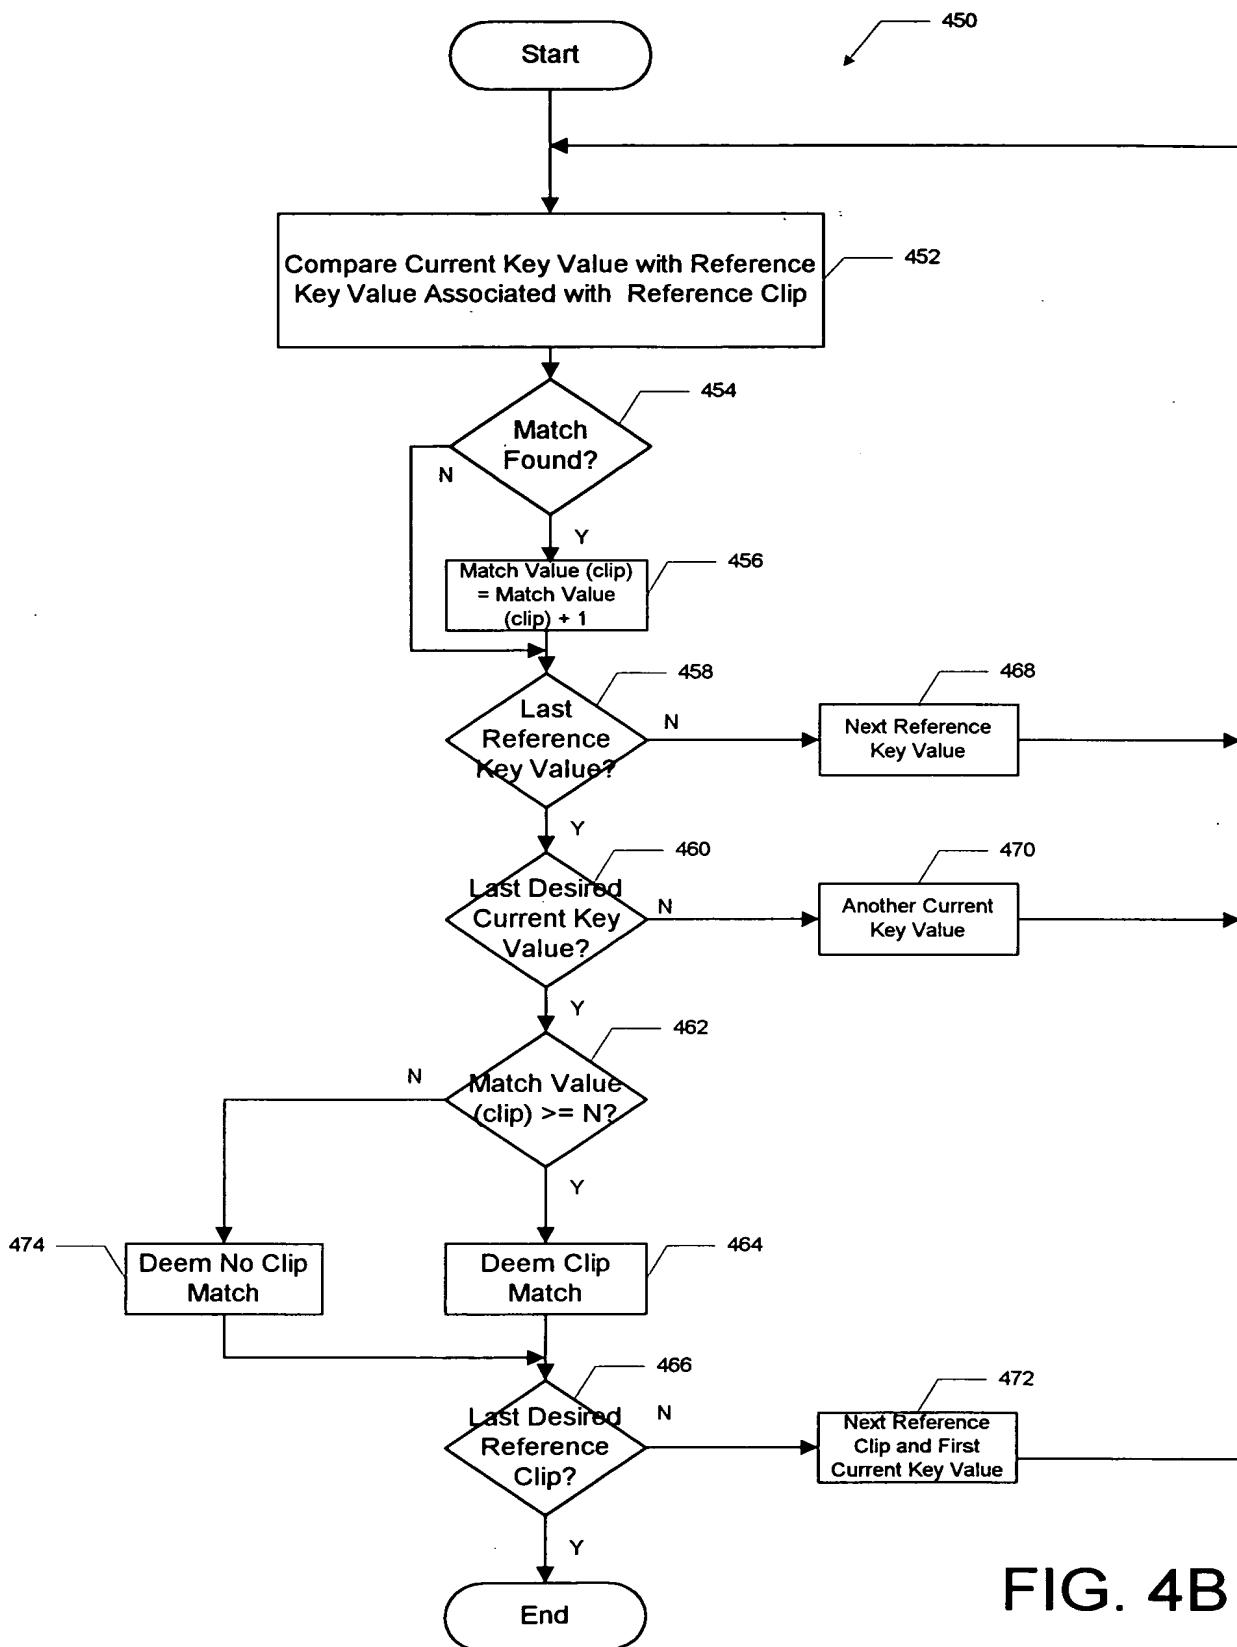


FIG. 4B

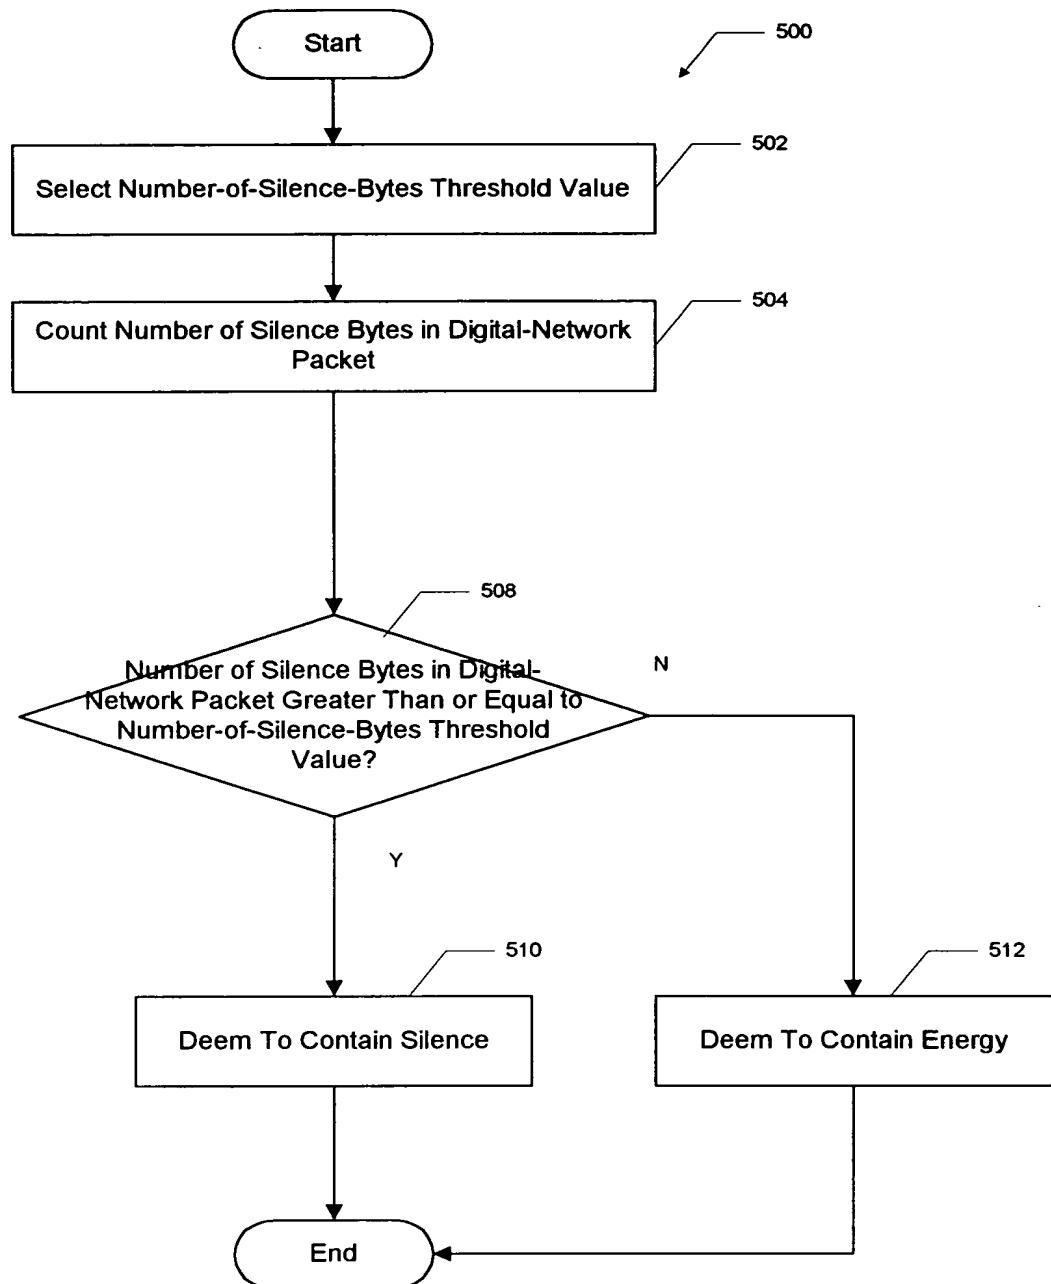


FIG. 5A

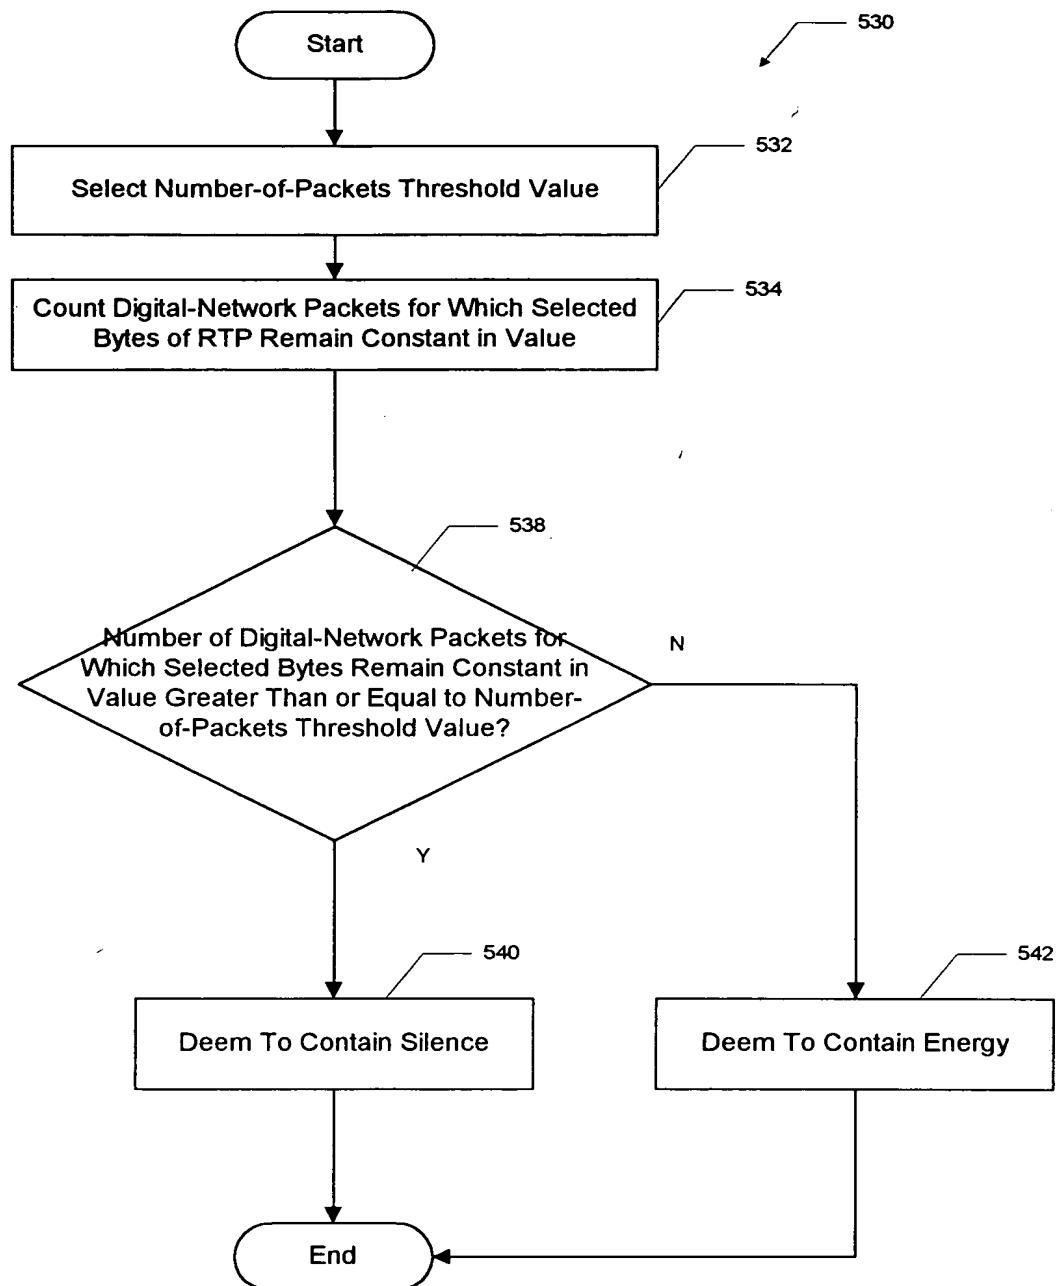


FIG. 5B

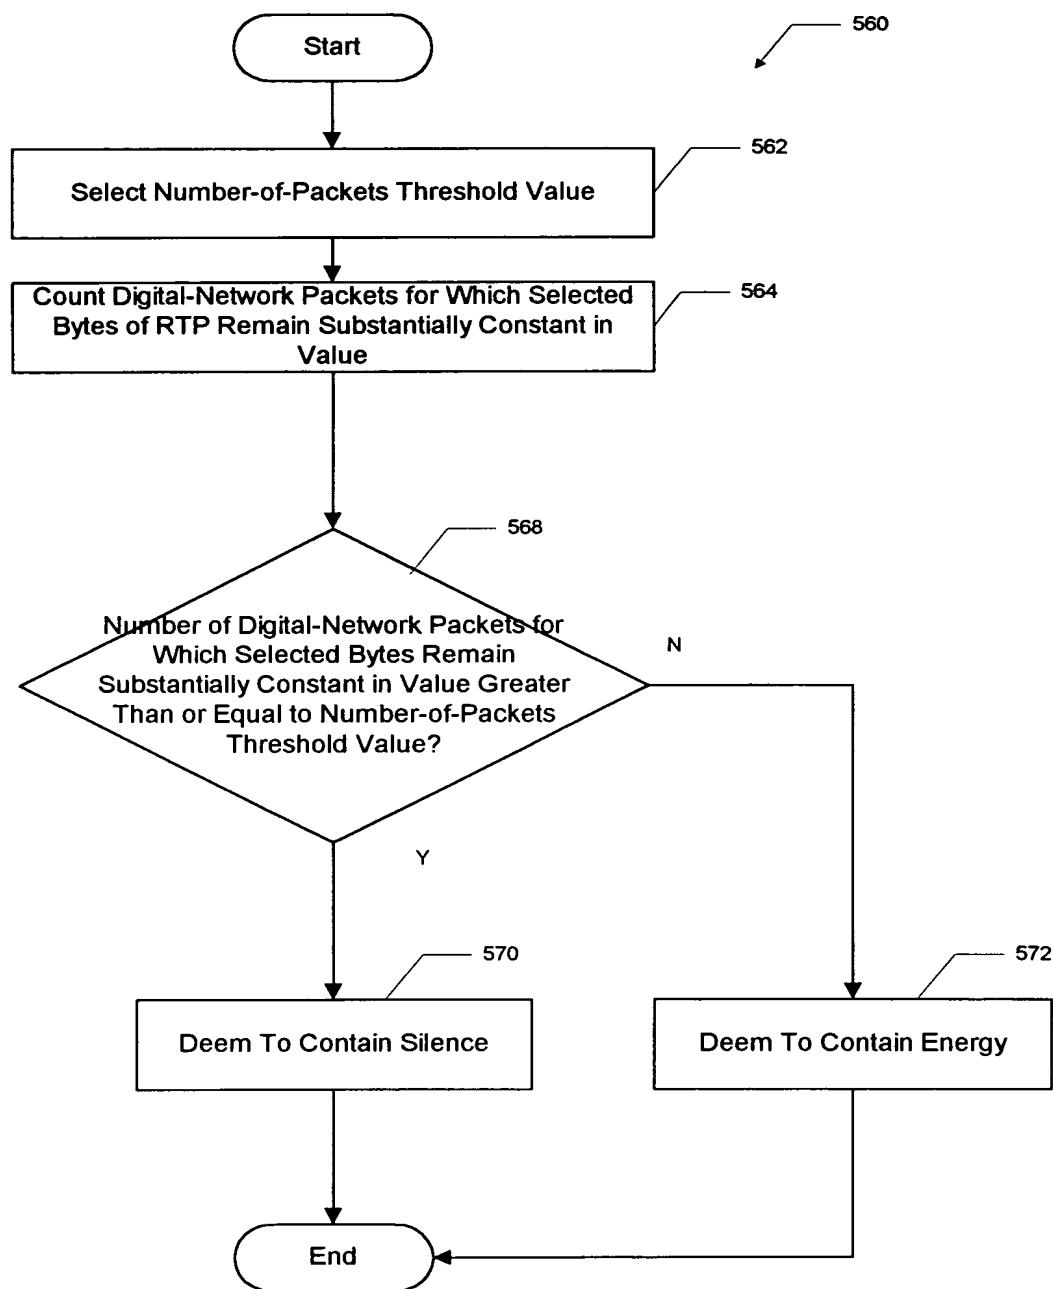


FIG. 5C

